


Please note that the data given here has been taken from the online catalog. Please refer to the user documentation for comprehensive information and data. The General Terms and Conditions of Use apply to Internet downloads.

► Extract from the online catalog

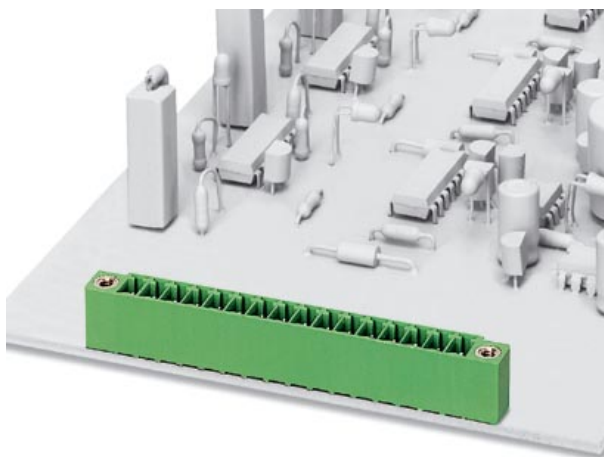

Header, nominal current: 8 A, rated voltage: 160 V, pitch: 3.5 mm, no. of positions: 2, mounting: Soldering

The illustration shows a 16-position version

Order No.	1843224
Ord designation	MCV 1,5/ 2-GF-3,5

EAN	4017918112417
Pack	50 Pcs.
Customs tariff	85369010000
Catalog page information	Page 113 (CC-2002)

► Technical data

Dimensions / positions

Pitch	3.5 mm
Dimension a	3.5 mm
Number of positions	2
Pin dimensions	0,8 x 0,8 mm
Hole diameter	1.2 mm

Technical data

Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	160 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	8 A
Nominal voltage U_N	160 V
Maximum load current	8 A
Insulating material	PBT
Inflammability class acc. to UL 94	V0

► Certificates

Certificate logos



UL


Comments	all numbers of positions are accepted
Nominal voltage U_N	300 V
Nominal current I_N	8 A

CSA


Comments	all numbers of positions are accepted
Nominal voltage U_N	300 V
Nominal current I_N	8 A

► Drawings

Drilling diagram



Dimensioned drawing



► Accessories

Item	Designation	Description
Marking		
0804073	SK 3,5/2,8:FORTL.ZAHLEN	Marker card, printed horizontally, self-adhesive, 10-section marker strip, 12 identical decades marked 1-10, 11-20 etc. up to 91-100, sufficient for 120 terminal blocks

Plug/Adapter

1734634	CP-MSTB	Coding section, is inserted into the slot on the plug or inverted header, red insulating material
---------	---------	---

► Additional products

Item	Designation	Description
General		
1847055	MC 1,5/ 2-STF-3,5	Plug with screw flange, nominal current: 8 A, rated voltage: 160 V, pitch: 3.5 mm, no. of positions: 2, type of connection: Screw connection
1863301	MCVR 1,5/ 2-STF-3,5	Plug component, nominal current: 8 A, rated voltage: 160 V, pitch: 3.5 mm, no. of positions: 2, type of connection: Screw connection
1863000	MCVW 1,5/ 2-STF-3,5	Plug component, nominal current: 8 A, rated voltage: 160 V, pitch: 3.5 mm, no. of positions: 2, type of connection: Screw connection

► Address

Phoenix Contact GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Phone +49 5235 3 00
Fax +49 5235 3 1200
<http://www.phoenixcontact.com>

Phoenix Contact
Technical modifications reserved;