

REV. CA

NOTES:

1. PARTS MAY BE CUT TO POSITION.
2. SHEAR TAILS TO DIMENSION SHOWN.
3. MEASURED AT BEND RADIUS, NOT AT END OF PIN.
4. TUBE ONLY -05 THROUGH -50 POSITIONS (SEE TABLE 2).
5. GOLD PLATING TO BE ON POST, TIN PLATING TO BE ON TAIL.
6. C REPRESENTS A CRITICAL DIMENSION.
7. MINIMUM PUSHOUT FORCE: 1.0 LB.
8. .003" MAX BURR ALLOWANCE
9. .010 [.25] MAX CUT FLASH
10. USE T-1S40-02-X-2 FOR FTSH-150-01-L-DV.
RAN ON AUTOMATION ONLY. TERMINALS ARE NOT SHEARED.
11. USE FTSH -SW BODIES UNTIL STOCK IS DEPLETED, THEN USE THE -CN BODY
(NOTE: BODY FOR -CN IS .200 WIDE, -SW IS .175).

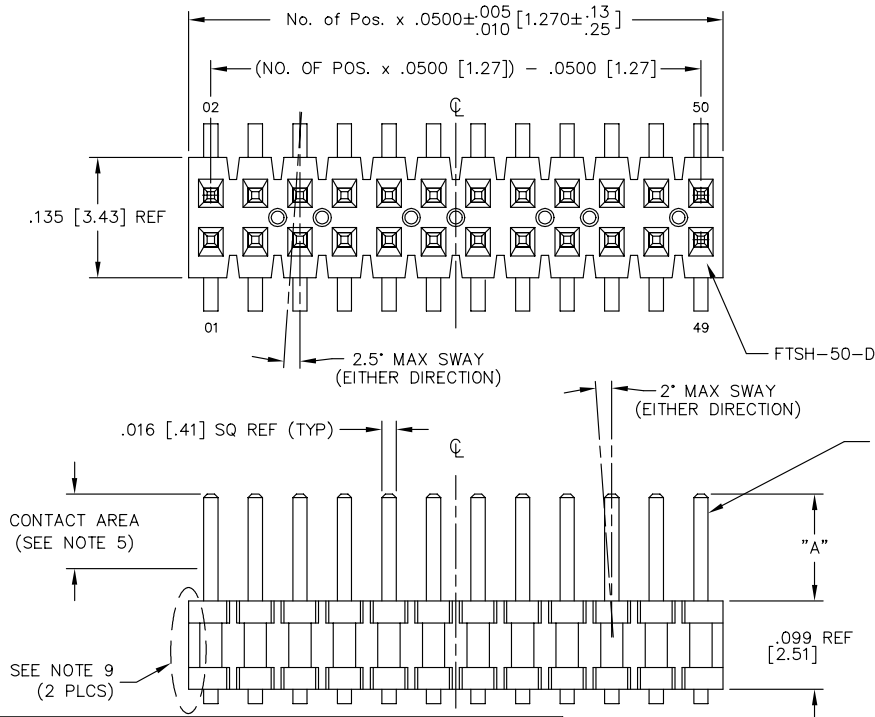


TABLE 2		
OPTION(S)	PACKAGING TUBE	TUBE PLUG
NONE, -A (-04 LEAD STYLE)	PT-1-24-04-15	TP-09 (2 REQ'D)
NONE, -A (-01, -02 LEAD STYLES)	PT-1-24-03-43	TP-24 (2 REQ'D)
NONE, -A (-03 LEAD STYLE)	PT-1-24-01-43	TP-24 (2 REQ'D)
-P (-01 LEAD STYLE)	PT-1-24-02-17	TP-09 (2 REQ'D)
-K-P (-01, -02, -03 LEAD STYLES)	PT-1-24-01-27	TP-03 (2 REQ'D)
-K-P (-04 LEAD STYLE)	PT-1-24-06-29	TP-07 (2 REQ'D)
-K (FOR -01 LEAD STYLE ONLY)		
-ES (-03, -04 STYLES)	PT-1-24-03-09	TP-03 (2 REQ'D)
-ES-P, -P (-02, -03, -04 STYLES)		
-EC, -EC-P, -EL-P -ES-A, -ES-A-P -A-P, -K-A-P -EP, -EP-A, -EP-P, -EP-A-P	PT-1-24-03-09	TP-03 (2 REQ'D)
-EJ, -EJ-K-P, -EJ-P	PT-1-24-02-70	TP-07 (2 REQ'D)
EJ-A-P	PT-1-24-01-106	TP-07 (2 REQ'D)
-EPC, -EPC-D, -EPC-P	PT-1-24-04-09	TP-03 (2 REQ'D)
-EL, -EL-A, -EL-A-P	PT-1-24-01-43	TP-24 (2 REQ'D)
-EJ-A, -EJ-K-A, -EJ-K-A-P	PT-1-24-01-70	TP-29 (2 REQ'D)
-ES (-02 LEAD STYLE)	PT-1-24-01-55	TP-03 (2 REQ'D)

FIG. 1

TABLE 1	
LEAD STYLE	"A"
-01	.120 [3.05]
-02	.075 [1.91]
-03	.065 [1.65]
-04	.150 [3.81]

DIMENSIONS ARE IN INCHES
UNLESS OTHERWISE NOTED
TOLERANCES ARE:
ONE PLACE DECIMALS $\pm .1$ [2.54] THREE PLACE DECIMALS $\pm .005$ [13]
TWO PLACE DECIMALS $\pm .01$ [25] FOUR PLACE DECIMALS $\pm .0010$ [25]

ANGLES
 $\pm 1^\circ$

TITLE:
.050 [1.27] x .050 [1.27] C
DOUBLE VERTICAL
SMT TERMINAL STRIP

DWG NO:
FTSH-1XX-XX-X-DV-XXX
SHEET 1 OF 4

FTSH-1XX-XX-X-DV-XXX

No. OF POS.
-02 THRU -50
(PER ROW)

LEAD STYLE
-01: .120 [3.05]
(USE T-1S15-03-X)
-02: .075 [1.91]
(USE T-1S15-03-X)
-03: .065 [1.65]
(USE T-1S15-03-X)
-04: .150 [3.81]
(USE T-1S15-03-X)

PLATING

-L: LIGHT SELECTIVE
(USE T-1S15-XX-L)
-F: FLASH SELECTIVE
(USE T-1S15-XX-F)
-S: SELECTIVE
(USE T-1S15-XX-S)


TAIL OPTION

-DV: DOUBLE VERTICAL
(USE FTSH-50-D)

OPTIONS

- P: PICK & PLACE PAD (4 POS MIN)
(SEE SHT 2, TABLE 5)
- TR: TAPE & REEL PACKAGING
- ES: END SHROUDS (SEE FIG. 2, SHT 2)
(MOLDED IN -EN 5 POS MIN; -02 & -03 LEAD STYLE ONLY)
(SNAP SHROUDS 9 POS MIN; -02 & -03 LEAD STYLE ONLY)
- EJ: EJECTOR SHROUDS (SEE FIG. 4, SHT 2)
(10 POS MIN; -01 LEAD STYLE ONLY)
- EJA: EJECTOR SHROUDS WITH MOLDED ALIGNMENT PIN (SEE FIG. 4, SHT 2)
(10 POS MIN; -01 LEAD STYLE ONLY) (NOT VALID WITH -A OPTION)
- EJC: EJECTOR SHROUDS WITH LOCKING CLIP (SEE FIG. 4, SHT 2)
(10 POS MIN; -01 LEAD STYLE ONLY) (NOT VALID WITH -A OPTION)
- EC: LOCKING CLIP (SEE FIG. 5, SHT 2)
(9 POS MIN; -02 & -03 LEAD STYLE ONLY)
- EP: GUIDE POST (SEE FIG. 6, SHT. 2)
(9 POS MIN; -02 & -03 LEAD STYLE ONLY)
(USE ONLY WHEN MATING WITH CLP)
- EL: BOARD LOCK (SEE FIG. 7, SHT 2)
(9 POS MIN; -02 & -03 LEAD STYLE ONLY)
(USE ONLY WHEN MATING WITH CLP)
- EPC: GUIDE POST & LOCKING CLIP (SEE FIG. 11, SHT 3)
(9 POS MIN; -02 & -03 LEAD STYLE ONLY)
(USE ONLY WHEN MATING WITH CLP) (NOT VALID WITH -A OPTION)
- A: ALIGNMENT PIN (MOLDED OR STAKED) (SEE FIG. 8 & 9, SHT. 3)
(MOLDED: 3 POSITION MIN, STAKED: 6 POSITION MIN)
[SAMTEC DISCRETION ON WHICH -A PIN USED]
- K: KEYING OPTION FOR MATING WITH FFSD (SEE TABLE 3, SHEET 3)
8 POSITION AVAILABLE AS STANDARD.
[POSITION 13, 17, 20 & 25 AVAILABLE WITH ANY END
SHROUD OPTION] (LEAD STYLE -01 ONLY, SEE FIG. 10, SHT 3)
(ALIGNMENT PIN AVAILABLE WITH -K OPTION BUT MUST BE MOLDED)
- *-M: METAL PICK & PLACE PAD (5 POS MIN)
(USE MPP-22-S) (SEE FIG. 13, SHT 4)
(NOT AVAILABLE WITH -K OPTION)

* = NOT ENGINEERING APPROVED

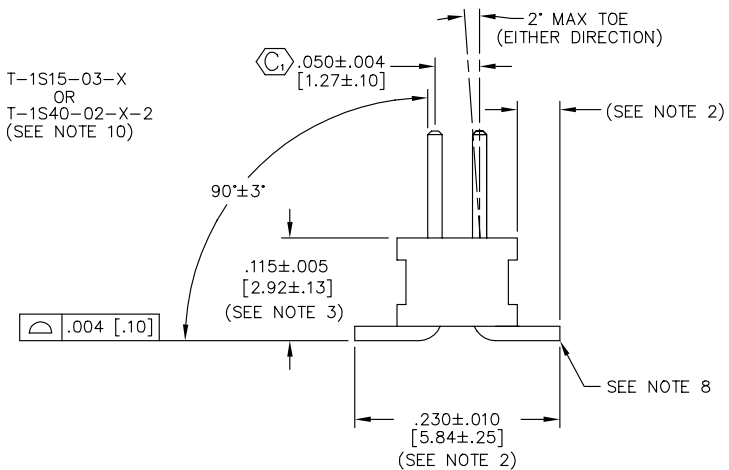

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSFERRED TO
OTHER DOCUMENTS OR DISCLOSED TO
OTHERS OR USED FOR ANY PURPOSE
OTHER THAN THAT FOR WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED
WRITTEN CONSENT OF SAMTEC INC.

MATERIAL:
INSULATOR:
BLACK LIQUID CRYSTAL POLYMER
TERMINAL:
PHOSPHOR BRONZE

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY:
PURVIS 10-12-95

FTSH-1XX-XX-X-DV-XXX
SHEET 1 OF 4