
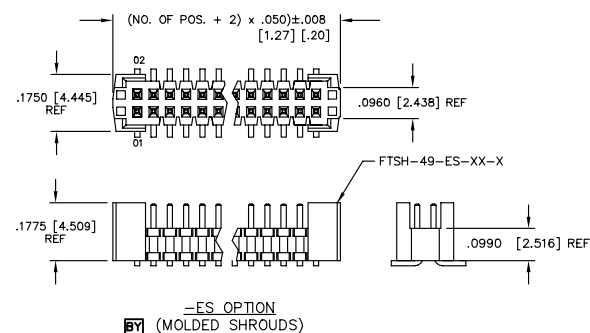


REV. CA

FIG. 2


(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1)
(USE -.02 OR -.03 LEAD STYLE ONLY)
(9 POS. MIN. FOR SNAP SHROUDS)

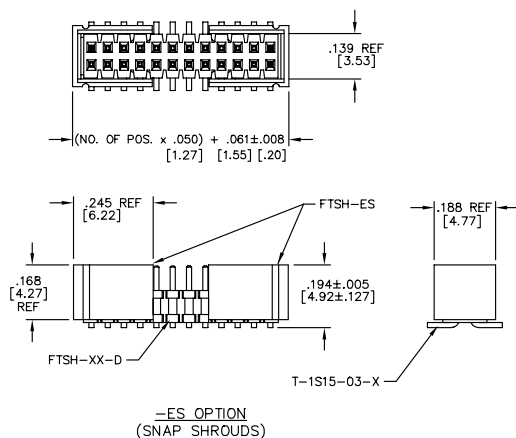

(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1)
(USE -.02 OR -.03 LEAD STYLE ONLY)
(5 POS. MIN. FOR MOLDED IN -ES)

FIG. 5

(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 2)

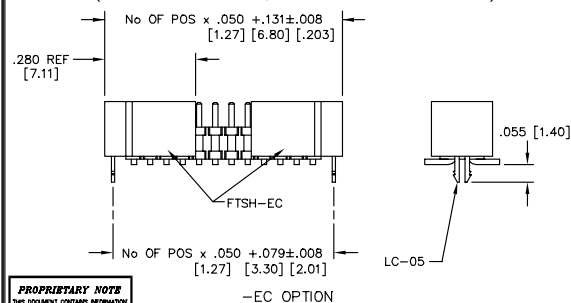

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION OF A PROPRIETARY NATURE AND IS THE PROPERTY OF SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC INC.



TABLE 5

OPTION	PAD	MIN. POS
NONE, -A	PPP-25	4
EJ,EJC,EJA	PPP-41	10
ES,EC,EP,EL	PPP-25	9
EPC	PPP-25	5 *
K, K-EJ	PPP-48	SEE FIG 10

* MOLDED SHROUD ONLY

FIG. 3


-P OPTION

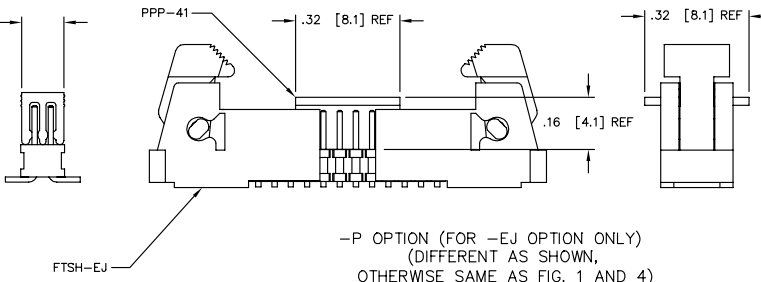


(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1)
(-.01 LEAD STYLE ONLY)

FIG. 6

(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 2)

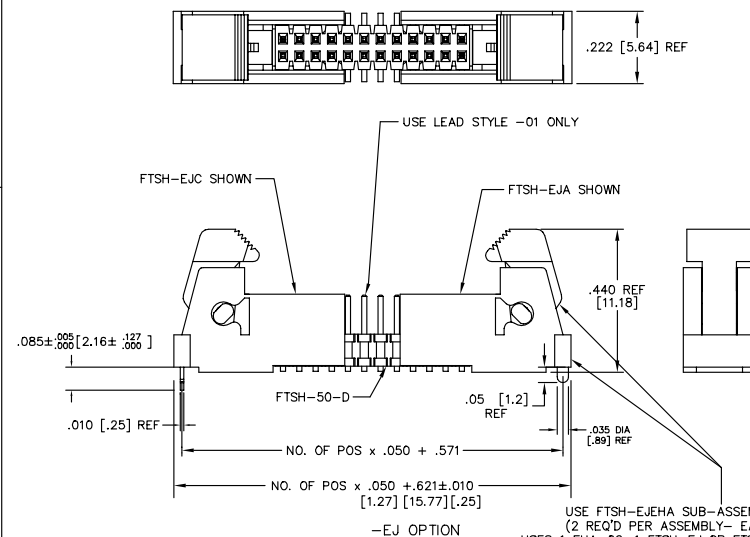

USE FTSH-EJEHA SUB-ASSEMBLY
(2 REQ'D PER ASSEMBLY- EACH
USES 1 EHA-.02, 1 FTSH-EJ OR FTSH-EJ-A)

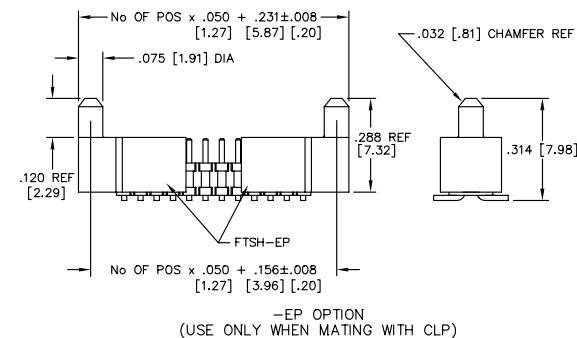

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: BRATCHER 05-03-95

FTSH-1XX-XX-X-DV-XXX
SHEET 2 OF 4

DIMENSIONS ARE IN INCHES		TOLERANCES ARE:		TITLE: .050 [1.27] x .050 [1.27] ☒ DOUBLE VERTICAL SMT TERMINAL STRIP	DWG NO: FTSH-1XX-XX-X-DV-XXX SHEET 2 OF 4
ONE PLACE DECIMALS ±.1[2.5]	THREE PLACE DECIMALS ±.005[.13]	ANGLES	± 2°		
TWO PLACE DECIMALS ±.01[.25]	FOUR PLACE DECIMALS ±.0020[.051]				

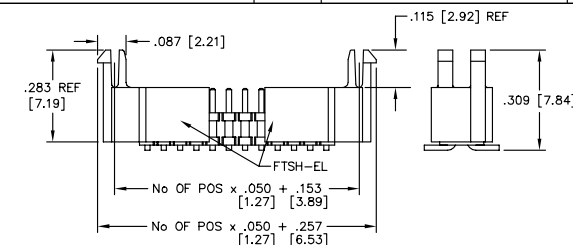


FIG. 7

(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 2)
-EL OPTION (USE ONLY WHEN MATING WITH CLP)