

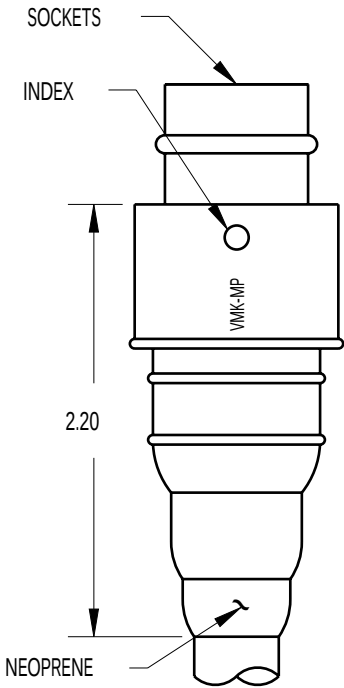
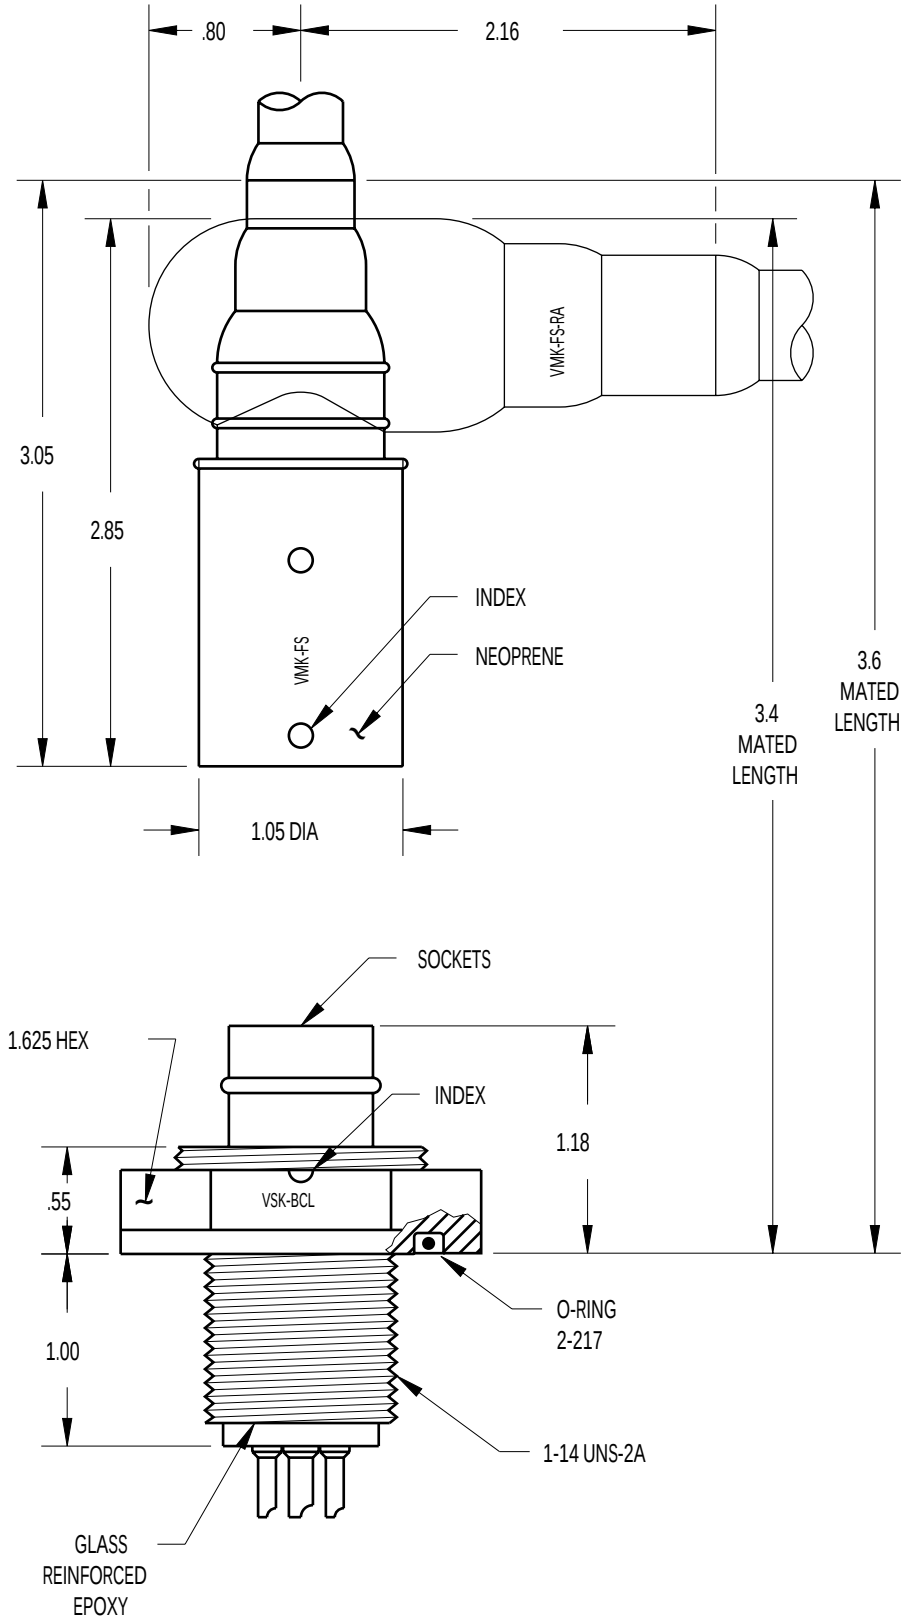


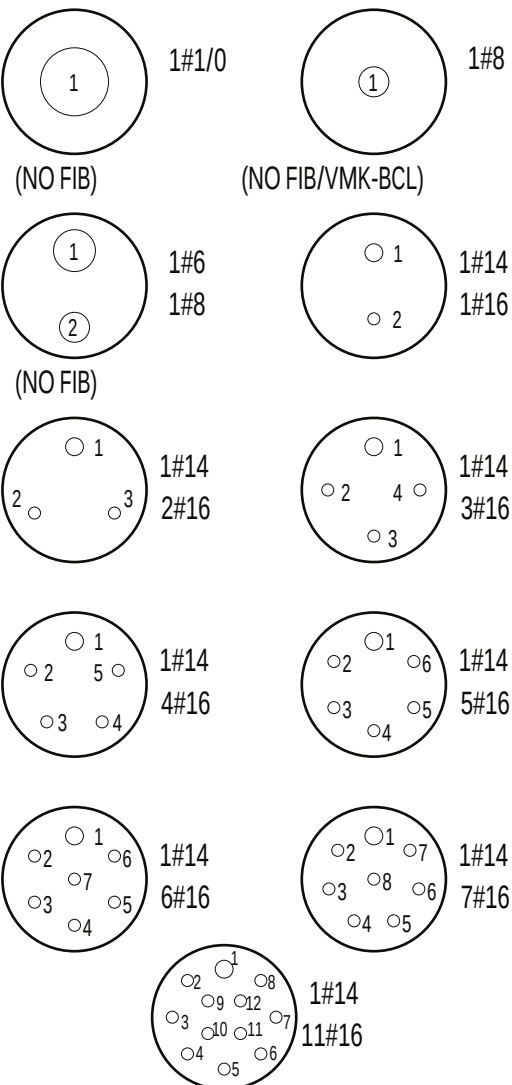

FIELD INSTALLABLE

CONTACT
CONFIGURATION
(FACE VIEW-BCL)

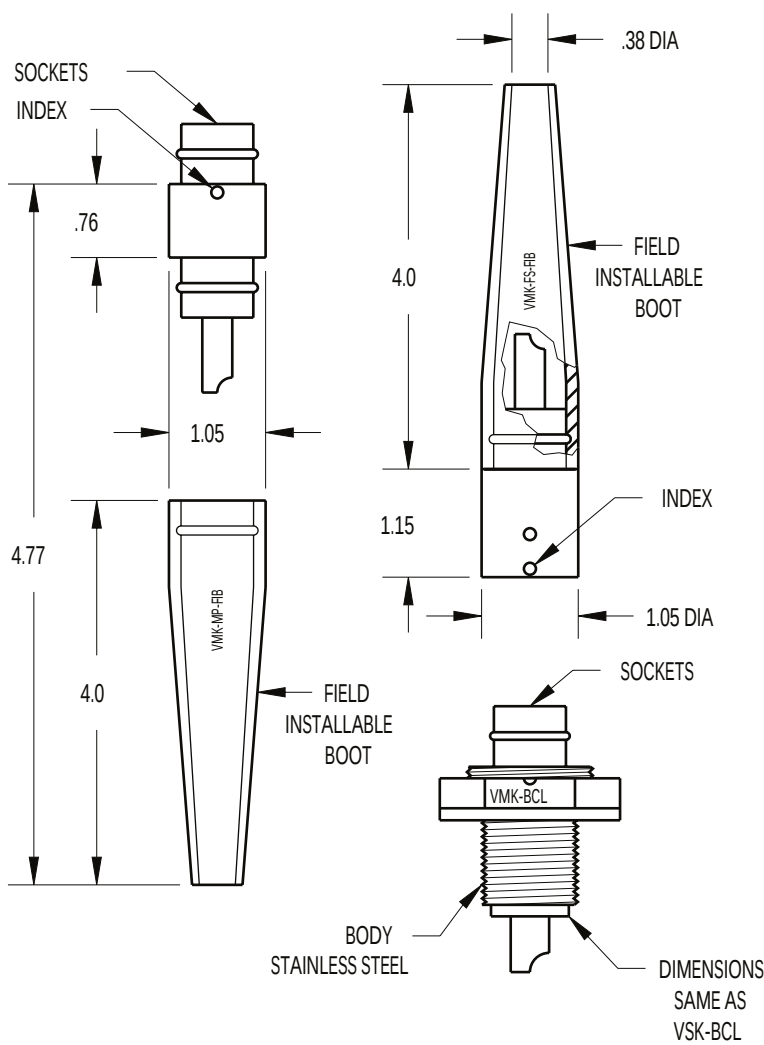

(NO VMK-BCL)

MOUNTING TORQUE FOR VSK-BCL	not to exceed 130 in/lbs	MATED PRESSURE RATING (psi) FOR VSK-BCL	10,000
MOUNTING TORQUE FOR VMK-BCL	not to exceed 150 in/lbs	MATED PRESSURE RATING (psi) FOR VMK-BCL	10,000
DUMMY PLUG FOR VSK-BCL, VMK-BCL, VMK-MP		DUMMY PLUG FOR VMK-FS	
LOW PRESSURE < 4,000 psi	VMK-FSD-LP	VMK- * -MPD	
HIGH PRESSURE > 4,000 psi	VMK- * -FSD-HP		

NOTE: Locking sleeves available in plastic or stainless steel, see Technical Bulletin 25 50.

* Please specify number of contacts.