

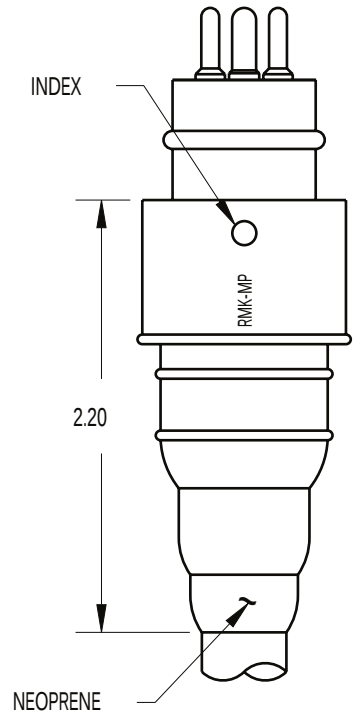
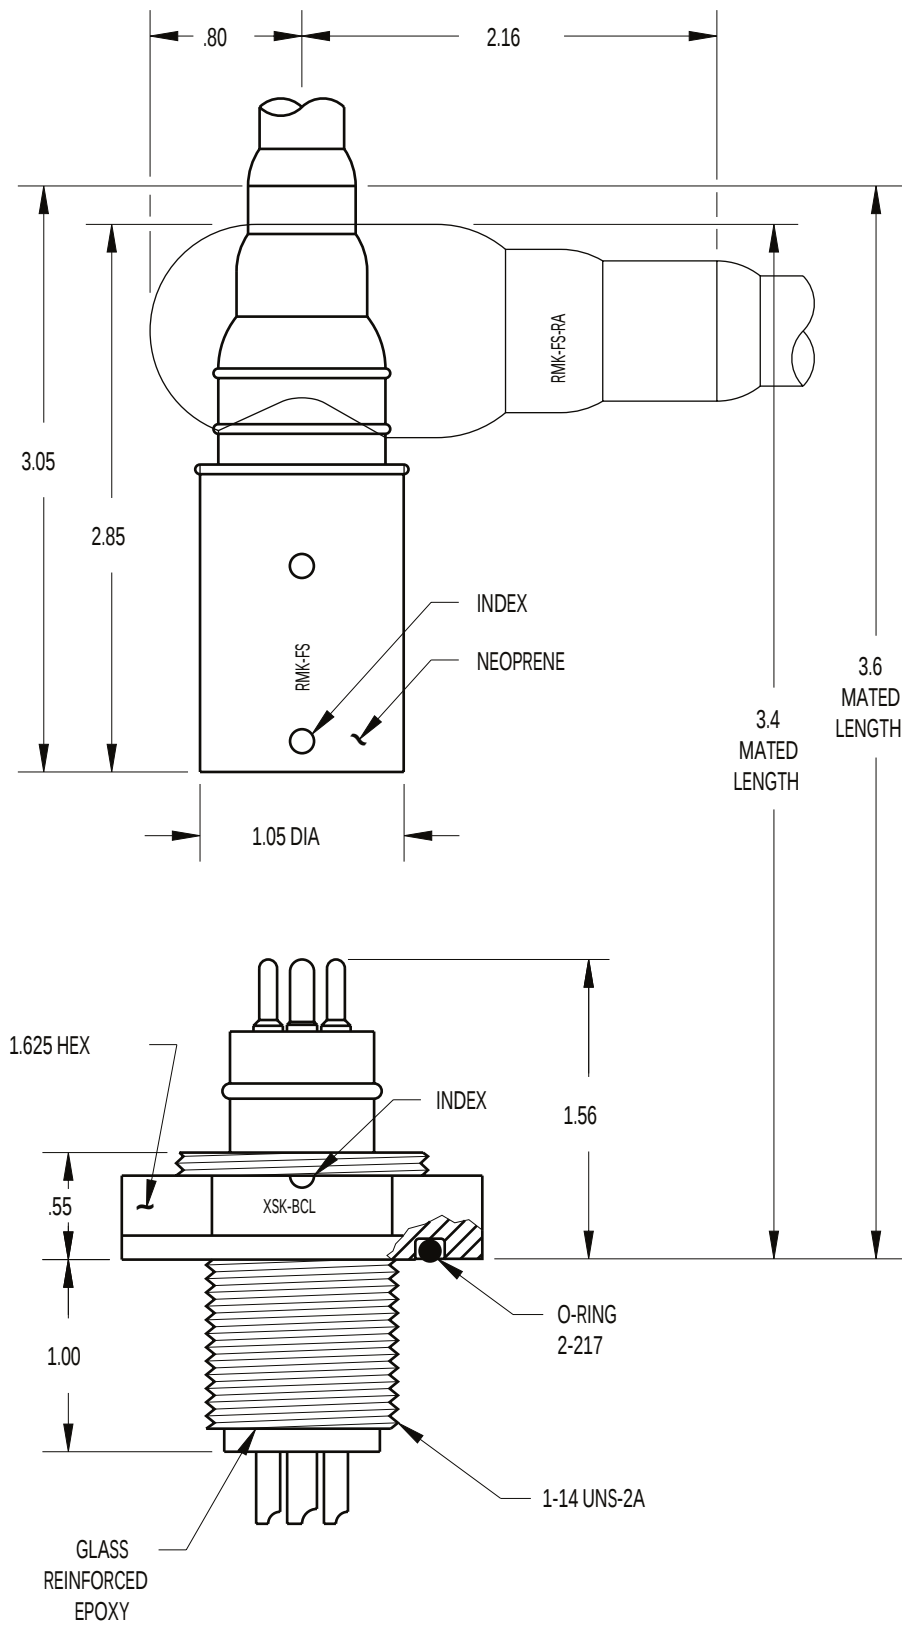


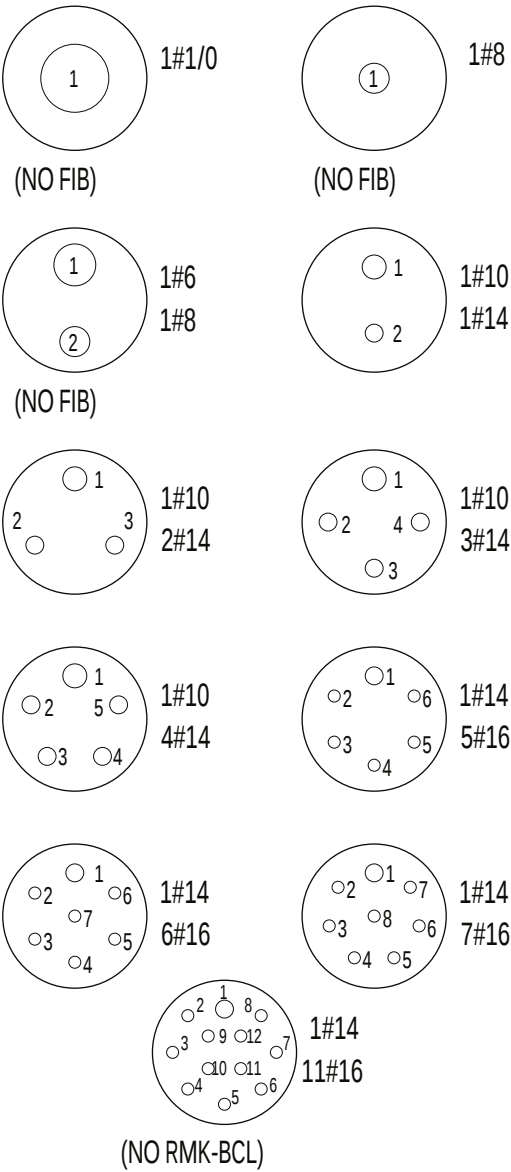

FIELD INSTALLABLE

CONTACT
CONFIGURATION
(BCL FACE VIEWS)

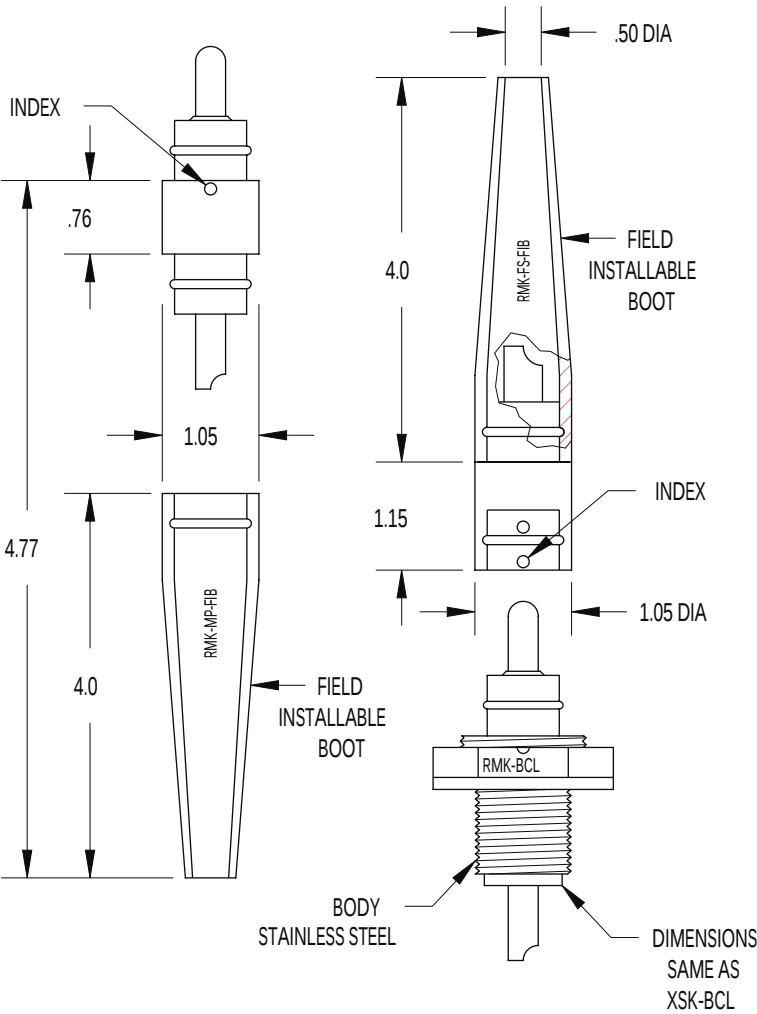

MOUNTING TORQUE FOR XSK-BCL	not to exceed 130 in/lbs	MATED PRESSURE RATING (psi) FOR XSK-BCL	10,000
MOUNTING TORQUE FOR RMK-BCL	not to exceed 150 in/lbs	MATED PRESSURE RATING (psi) FOR RMK-BCL	10,000
DUMMY PLUG FOR XSK-BCL, RMK-MP, RMK-BCL		DUMMY PLUG FOR RMK-FS	
RMK- *-FSD		LOW PRESSURE < 4,000 psi	RMK-MPD-LP
		HIGH PRESSURE > 4,000 psi	RMK- *-MPD-HP
NOTE: Locking sleeves available in plastic or stainless steel, see Technical Bulletin 20 40. * Please specify number of contacts.			