




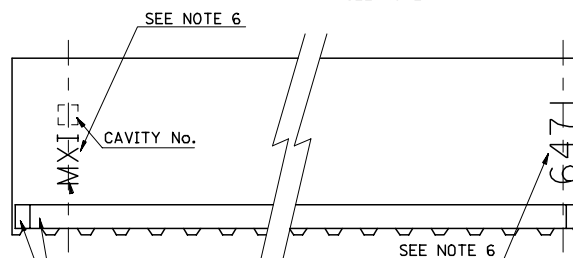
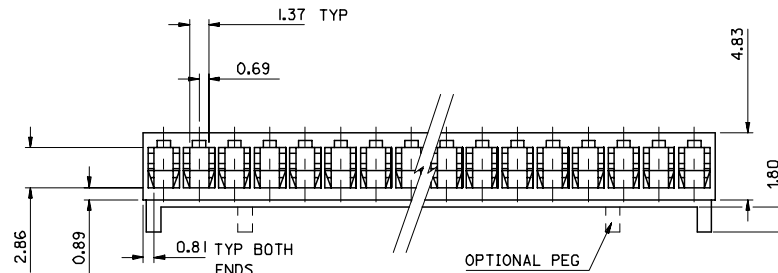
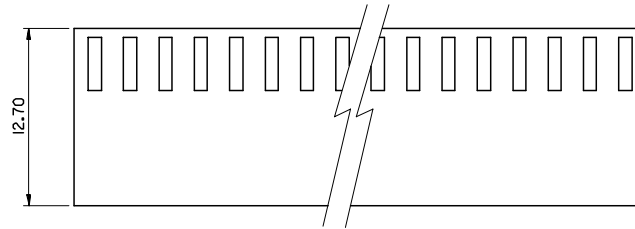


28	68.58±0.25	71.58±0.25
27	66.04±0.25	69.04±0.25
26	63.50±0.25	66.50±0.25
25	60.96±0.25	63.96±0.25
24	58.42±0.25	61.42±0.25
23	55.88±0.25	58.88±0.25
22	53.34±0.25	56.34±0.25
21	50.80±0.25	53.80±0.25
20	48.26±0.25	51.26±0.25
19	45.72±0.20	48.72±0.20
18	43.18±0.18	46.18±0.18
17	40.64±0.15	43.64±0.15
16	38.10±0.15	41.10±0.15
15	35.56±0.13	38.56±0.13
14	33.02±0.13	36.42±0.13
13	30.48±0.13	33.48±0.13
12	27.94±0.13	30.94±0.13
11	25.40±0.10	28.40±0.10
10	22.86±0.10	25.86±0.10
9	20.32±0.08	23.32±0.08
8	17.78±0.08	20.78±0.08
7	15.24±0.08	18.24±0.08
6	12.70±0.05	15.70±0.05
5	10.16±0.05	13.16±0.05
4	7.62±0.05	10.62±0.05
3	5.08±0.05	8.07±0.05
2	2.54±0.05	5.53±0.05
No. OF CCTS	DIM. A	DIM. B

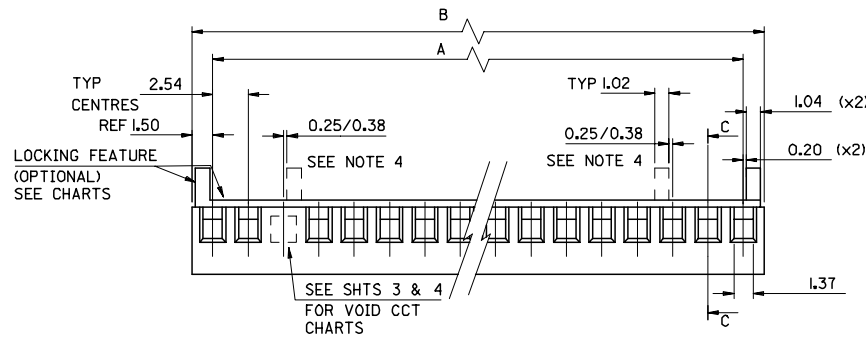

C-C
PARTIAL SECTION

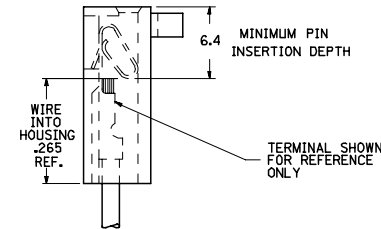

- NOTES:
1. MATERIAL: POLYAMIDE (PA66/6), UL94 V-0
COLOR: NATURAL PER THE FOLLOWING 89992-0086
 2. FOR USE WITH ANTI-FISH HOOKING TERMINAL No. 4809-..
 3. SEE SHT. 3 FOR PARTS WITH VOIDS.
 4. OPTIONAL CENTRE PEGS TO BE USED ON 7cct & LARGER SIZES ONLY. SEE SHT. 3 FOR CHARTED ENG. No.'S.
 5. PART No. PRECEDED BY CODE LETTER DESIGNATES MFG. LOC'N. I=IRELAND

HOUSING STYLE

BLANK NO LOCKING RAMP
I = LOCKING RAMP & POL. RIB
S = OPT. PEG
R = LOCKING RAMP ONLY

NO. OF CCTS

BLANK = STD. VOID
B = OPT. STYLE VOID

VOID CCT LOC'N.

6. 'MX*' MARK AND PART I.D. '647I' APPEAR EITHER ON FRONT OR BACK SIDE. SEE END VIEW FOR SIDE SIDE ORIENTATION.

CORRECT DIMENSION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
		mm	INCH	MM ONLY	INCH	4:1	METRIC		
4 PLACES ±---	▽=0	±---	±---	4 PLACES ±---	±---	4:1	METRIC		
3 PLACES ±---	▽=0	±---	±---	3 PLACES ±---	±---	4:1	METRIC		
2 PLACES ±0.15	▽=0	±---	±---	2 PLACES ±0.15	±---	4:1	METRIC		
1 PLACE ±0.25	▽=0	±---	±---	1 PLACE ±0.25	±---	4:1	METRIC		
ANGULAR ±---	▽=0	±---	±---	ANGULAR ±---	±---	4:1	METRIC		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SEE CHART					

[illegible]

[illegible]

[illegible]

OPTIONAL STYLE VOID (SECTION E-E)									
PART NO.	ENG NO.	NO. OF CIRCUITS	VOID CCT LOCATION	RAMP & POL. RIBS	DIM. A	DIM. B			
22-01-6021	E-6471-02-02B	2	2	NO	↑	↑			
NOT TOOLED	↑ -021-02B	2	↑	YES					
22-01-6071	-07-02B	7		NO					
NOT TOOLED	-071-02B	7		YES					
22-01-6101	-10-02B	10		NO					
NOT TOOLED	-101-02B	10		YES					
22-01-6111	↑ -11-02B	11	↑	NO					
NOT TOOLED	E-6471-111-02B	11	2	YES	↑	↑			

PART NO.	ENG NO.	NO. OF CIRCUITS	RAMP	DIM. A	DIM. B
97-00-1062	E-6471-2R	2	YES	↑	↑
↑ -1063	↑ -3R	3	↑		
-1064	-4R	4			
-1065	-5R	5			
-1066	-6R	6			
-1067	-7R	7			
-1068	-8R	8			
-1069	-9R	9			
-1070	-10R	10			
-1071	-11R	11			
-1072	-12R	12			
-1073	-13R	13			
-1074	-14R	14			
-1075	-15R	15			
↑ -1076	-16R	16			
97-00-1077	-17R	17			
NOT TOOLED	-18R	18		SEE SHEET I FOR DIMENSION	SEE SHEET I FOR DIMENSION
↑	-19R	19			
	-20R	20			
	-21R	21			
	-22R	22			
	-23R	23			
	-24R	24			
	-25R	25			
	-26R	26			
↑	↑ -27R	27	↑	↑	↑
NOT TOOLED	E-6471-28R	28	YES	↑	↑

22-01 -2285	E-6471-281	28	○	▲	▲
22-01 -2265	▲ -271	27	▲		
22-01 -2265	-261	26			
22-01 -2245	-251	25			
22-01 -2245	-241	24			
22-01 -2235	-231	23			
22-01 -2225	-221	22			
22-01 -2215	-211	21			
22-01 -2205	-201	20			
22-01 -2195	-191	19			
22-01 -2185	-181	18			
22-01 -2175	-171	17			
22-01 -2165	-161	16			
22-01 -2155	-151	15			
22-01 -2145	-141	14			
22-01 -2135	-131	13			
22-01 -2125	-121	12			
22-01 -2115	-111	11			
22-01 -2105	-101	10			
22-01 -2095	-091	9			
22-01 -2085	-081	8			
22-01 -2075	-071	7			
22-01 -2065	-061	6			
22-01 -2055	-051	5			
22-01 -2045	-041	4			
22-01 -2035	▲ -031	3	▼		
22-01 -2025	E-6471-021	2	○	▼	▼
PART NO.	ENG. NO.	NO. OF CKTS.	NO. OF RAMP & POL. RIBS	A	B

注記
NOTES

- 適合ターミナル 4809-*(22-30 GA)
クリンプ部 被覆外径 φ1.58mm以下
FOR USE TERMINAL 4809-*(22-30 GA)
CRIMP TYPE ,MAX. INSULATION φ1.58mm
 - ハウジングの端と端を合わせて積み重ねることができる。
TWO(2) HOUSINGS MAY BE STACKED END TO END.
 - () 内寸法は参考寸法
() DIMENSION IS FOR REFERENCE.
 - 本製品は仕様書NO.10-07に基づく。
THIS PART CONFORMS TO MOLEX PRODUCT SPEC. NO.10-07
- △(例：1=アイルランド)
トレードマークはMOLEX AND MORE LETTER OF ALPHABET
WHICH MEAN THE MANUFACTURING COUNTRY. (c.g. I=IRELAND)
- 19から28極は標準品ではありません。
 - 19-28 CIRCUITS ARE NON-STANDARD.
 - 一般公差：±0.4
 - GENERAL TOLERANCES:±0.4

材料 ナイロン6/6。UL94V-0 NYLON6/6,UL94V-0	仕上げ //	適用電線範囲 //	被覆外径 //	ハウジング名 HOUSING *KK (2.54)/.100
新線/新径 RELEASED (JC80224) DR. CHK. DATE	9/7/09 9/7/09/19	9/7/09/18	9/7/09/18	CRIMP TYPE,ANTI FISH-HOOKING TERMINAL WITH LOCKING RAMP
一般公差 GENERAL TOLERANCES	0.2	0.25	0.25	DWG. NO. SDE-6471-N*-*
配号 REV. NO.	1	2	3	REV

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX/JAPAN AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モリス（株）の所有する情報を含むもので、当社の許可なく複製を禁止する。

MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING